


Bucket Selection Guide

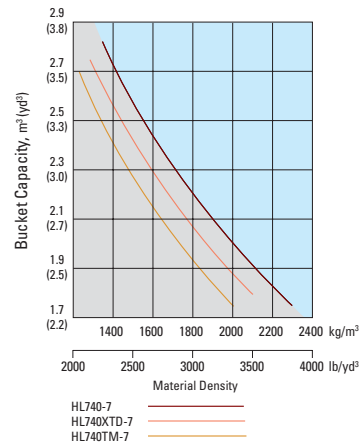

Supplemental Specifications

Description	Change in operating weight kg(lb)	Change in static tipping load-straight kg(lb)	Change in static tipping load-40° turn kg(lb)
17.5-25 12PR L2	-308 (-679)	-218 (-481)	-192 (-423)
17.5-25 12PR L3	-248 (-547)	-175 (-386)	-155 (-342)
20.5-25 16PR L2	-64 (-141)	-45 (-99)	-40 (-88)
17.5 R25 XHA*	-160 (-353)	-113 (-249)	-100 (-220)
20.5 R25 XHA*	+507 (+1,118)	+358 (+789)	+317 (+699)

Standard Equipment

- Electrical system**
Alternator, 70A
Alarms, audible and visual
- air filter clogging
- transmission error
- alternator voltage
- brake oil pressure
- engine oil pressure
- parking brake
- fuel level
- hydraulic oil temperature
- coolant temperature
- service brake oil pressure
Batteries, 850 CCA, 12V, (2)
Gauges
- engine coolant temperature
- fuel level
- hydraulic oil temperature
- speedometer
- transmission oil temperature
- voltmeter
Horn, electric
Indicator lights
- clutch cut-off
- high beam
- turn signal
- work light
LCD Display
- clock and fault code
- operating hour counter
- engine rpm
- transmission gear range indicator
- job time and distance
- temperature(coolant, hydraulic oil, T/M oil)
- Lighting system**
- 2 dome lights
- 2 stop and tail lights
- 4 turn signals
- brake lights(counterweight)
- license plate light
- head light
2 on front tower
- working lights
2 on front roof
2 on grill
- Switches**
- buzzer stop
- clutch cut-off
- hazard
- Ignition key, start/stop switch
- main light(illumination and head light)
- parking
- rear wiper & washer
- work light
- full automatic transmission
Starter, electric
Starting and charging system(24-volt)

- Cab**
Cab, ROPS/FOPS
(sound suppressed and pressurized) with :
- cigar lighter & ashtray
- coat hook
- front/rear window defroster
- intermittent wiper and washer, front and rear
- personal storage space: holder, can and cup
- rear view mirrors (2 inside)
- rear view mirrors (2 outside)
- seat belt
- seat, adjustable suspension with armrests
- tilt / telescopic steering column
- steering wheel with knob
- sunvisor (front window)
- tinted safety glass
Magazine box
Pedals
- one accelerator pedal
- one brake pedal
Rubber floor mat
Wrist rest
- Engine**
Antifreeze
Engine, Cummins QSB5.9-C
- Low Emission Diesel, Tier-II

- Engine enclosure, lockable
Engine fuel priming pump
Fan guard
Fuel/water separator
Fuel warmer
Muffler, under hood with large exhaust stack
Precleaner, engine air intake
Radiator
Starting aid (air intake heater)
Water sensor on fuel filter
- Power Train**
Brakes : Service, enclosed wet-disc
Differential, Front : limited Slip
Rear : conventional
Parking brake
Torque converter
Transmission, computer-controlled, electronic soft shift, auto-shift and quick-shift features included
Transmission oil cooler
- Hydraulics**
Boom lock safety valve
Boom kickout, automatic
Bucket positioner, automatic
Diagnostic pressure taps
Hydraulic system,
- 2 spool, single lever, pilot control for boom and bucket actuation

- Steering, load-sensing
Remote cooling fan, hydraulically-driven, temperature sensing type
- Others**
Articulation locking bar
Coolant level sight gauge
Counterweight
Door and cab locks, one key
Doors, service access(locking)
Drawbar with pin
Engine oil level dipstick gauge
Ergonomically located and slip resistant, left & right
- handrails
- ladders
- platforms
- steps
Fenders(front/rear)
Guard, bucket cylinder rod
Hydraulic oil level sight gauge
License plate bracket
Lift and tie-down hooks
Steering stops, cushioned
Tires(20.5-25, 16PR,L3)
Transmission oil level dipstick gauge
Vandalism protection caplocks

Optional Equipment

- 24-volt to 12-volt DC converter
Air condition :
- air conditioner
- air conditioner with heater
- heater
Alarm, back-up
Beacon light, rotating
Lighting, auxiliary, 4 on roof
Cutting edge, bolt-on type
Differential, Front : no spin
Rear : limited slip
- Emergency steering system
Fire extinguisher
Hourmeter
High lift arrangement with optional counterweight, 760 kg (1,680 lb)
Hydraulic control, 2 lever
Hydraulic control, 3 lever
Hydraulic arrangement 3-valve
Lighting, auxiliary, 4 on roof
Main disconnect switch
- Mud guard
Operator suit
Radio cassette player
Ride control system
Seat
- 2" static seat belt & adjustable mechanical suspension(vinyl)
- 3" static seat belt & adjustable mechanical suspension

- 3" retractable seat belt & adjustable air suspension
Tires :
- 17.5 - 25, 12PR, L2
- 17.5 - 25, 12PR, L3
- 20.5 - 25, 16PR, L2
- 17.5 R25 XHA*
- 20.5 R25 XHA*
- Tool kit
Tooth, 1 piece, bolt-on type
Guards
- crankcase
- transmission
Wheel chock
Window, sliding (left and right side)

Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine shown may vary according to International standards. All US measurement rounded off to nearest pounds or inches.



Some of the Photo may include optional equipment.

HYUNDAI WHEEL LOADER **Applied Tier 2 Engine**

HL740-7 / HL740TM-7 / HL740XTD-7



Head Office(Sales Office)
1 JEONHA-DONG, DONG-GU, ULSAN, KOREA Tel (82) (52) 202-7970, 7729 Fax (82) (52) 202-7979, 7720
U.S. Operation : Hyundai Construction Equipment U.S.A., Inc.
955 ESTES AVENUE, ELK GROVE VILLAGE IL, 60007 Tel (1) 847-437-3333 Fax (1) 847-437-3574
European Operation : Hyundai Heavy Industries Europe N.V.
VOSSENDAAL 11, 2440 GEEL, BELGIUM Tel (32) 14-562200 Fax (32) 14-593405-06
India Operation : Hyundai Construction Equipment India Private Limited
303, 3rd Floor, Siddhivinayak Aarum, 33/1/12 Vadgaon Sheri,
Vinam Nagar, Pune 411 014 India Tel 91-20-4003-8160 Fax 91-20-4003-8163

PLEASE CONTACT



Hardworking Hyundai Loaders



Meet the new generation wheel loader in Hyundai.

The HL740-7 will give you the satisfaction in higher power, lower fuel consumption, more comfort and lower emission.

Come and experience what Hyundai has created for you by bringing together power and up-to-the-minute technology.

Wheel Loader **HL740-7**

Engine

- Electronic Engine Control System
- Engine Protection & Self-diagnosis System
- Max. Power 145 HP

Transmission

- 2 Automatic Selection Mode
- 2 Kick Down Function Mode
- AEB Function



HL740™-7

■ Some of the photos may include optional equipment.

Control Center

The all-new, deluxe operating space was engineered with 3-D modeling to be your ultimate control center. The wide, tinted and laminated front windshield has no framing cutting through to ensure excellent visibility.



The Centralized Display & Switch Panel

The centralized digital display shows the status and conditions of your machine at a glance.



Joystick Control Lever

Two kickdown switches located on top of the loader control lever and the gear shifting lever allow the operator to change instantly to 1st stage lower gear, in order to drive at full power into the material.




The Air Conditioning and Heating System



The operator can easily control the temperature and air flow. The defroster on the front windshield and rear window makes it convenient for winter working usage.


Up-to-date-technology CAN system

Engine Control Unit(ECU), Transmission Control Unit(TCU) and Machine Control Unit(MCU) realize the optimal performance through the mutual CAN communications.

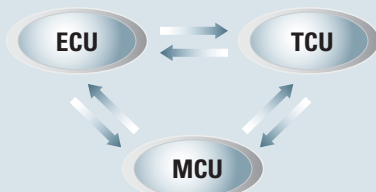

Some of the photos may include optional equipment.

Adjustable steering column




Full automatic shift lever

A single lever on the left side of the steering column gives the operator fast, easy control of speed and direction. Push the lever forward to go forward, pull it back for reverse.

Travelling is automatically changed from 1st stage to given stage according to travel speed and tractive effort.

The operator can select two kinds of automatic modes (1st ↔ 4th, 2nd ↔ 4th).

This exclusive feature contributes to an improvement in productivity and reduction of operator fatigue.

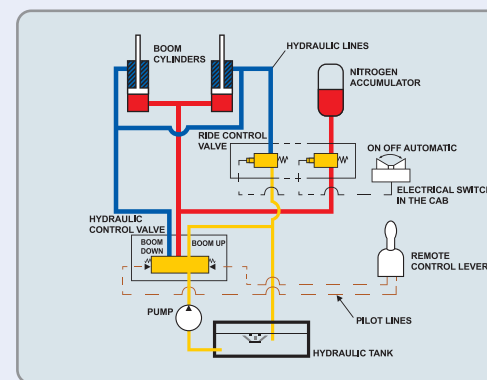

Ride control system (optional)

The ride control system is available for smooth travelling as an option. It significantly reduces machine bouncings and absorbs the shocks in the machine, enhancing the productivity of the machine. This system reduces the fatigue of the driver as well as the stress on the structures and components.

The system is consisted of accumulators in the hydraulic lift circuit, hydraulic control valve and selection switch.

① Off position : Function is cancelled ② On position : Function is available ③ Auto position : Function is available when the machine travels above 9.5km/hr(6.0mph). If the machine travels under 8 km/hr (5.0 mph), the function is cancelled automatically.

A Well Rounded System



Some of the photos may include optional equipment.




Up-to-date hydraulic remote cooling fan

The minimum fuel consumption and low noise is realized by applying hydraulic cooling fan that senses coolant temperature, intake air temperature, transmission oil temperature and hydraulic oil temperature.

Reversible cooling fan (Option)

Optional reversible cooling fan that ejects debris in the radiator and cooler.

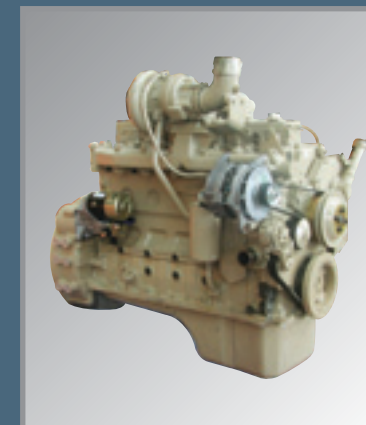

Engine

The CUMMINS QSB5.9-C electronic control engine combines full-authority electronic controls with the reliable performance. The combination of improved airflow and evenly dispersed fuel results in increased power, improved transient response and reduced fuel consumption. And the QSB5.9-C used advanced electronics

controls to meet the emission standards (EPA TierII, EU StageII)



Multi Function Transmission

The newly developed transmission control represents the beating heart of transmission. The hydraulic system for gearshifts is working with proportional valves, which allows a very precise control of the clutches. For each gear change, the control unit performs a monitoring function to ensure that the specified shift curve is adhered, and readjusts the shift pressure applied to the clutches accordingly. This results in smooth gearshifts-even when

loaded-without traction interruptions. This helps to avoid standstill of the vehicle, sudden load changes and torque peaks under all conditions, for example, application on steep terrain with full load. In addition, there is an option for the driver to make gearshifts manually.




Axle

Inboard type brake discs. Heavy duty axle.



Bucket cylinder guard

This guard helps to prevent possible damages from the load material.

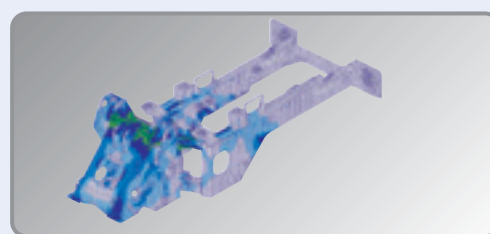


High-rigidity frames

Front and rear frames are designed for work in the toughest applications to provide high rigidity for the power train and loader equipment. The high-rigidity frames, together with the reinforced loader linkage, resist loading stress and shock.



Battery master switch

A master switch disconnects the battery power to protect the electrical system from excessive electrical drainage.



Chromium - Plated PIN is applied

With the application of Chromium Plated PIN, durability and precision are improved and the life cycle became longer.



Sealed loader linkage

Fully protected fitting and the sealed loader linkage with dust seals and o-ring will extend lubrication intervals remarkably.



Frame lock

The machine can be locked by this locking bar to prevent movement during transportation.

Accessible and Serviceable



■ Some of the photos may include optional equipment.



Easy Access to All Engine Accessory

Here you find the engine oil check, and the main and pre-filters. The large access engine side panels allows easy and safe inspections. The fuel filter can be spun on and off for quick replacements.



Cabin Air Fresh Filter

The internal pressure is maintained to be slightly higher than outside to exclude dust and to reduce noise levels.



Remote type drain port

It is now easier to change your engine oil, coolant and hydraulic oil with the remote drain port.



Coolant Sight Gauge

The coolant sight gauge is installed on the radiator top tank for convenient checks of coolant level.



Accessible grease fittings

Grease fittings are highlighted and available around the machine for fast access when doing your service checks.



Simple air filter replacements

The air cleaner is easily replaceable by turning the wing nut on the outer shell counterclockwise.



Central electric controllers & Fuse box

Electric controllers for Hyundai loader are centralized to improve serviceability. A concentrated fuse box for easy inspection.



Hydraulic tank

The hydraulic tank is located behind the cab to increase the accessibility of hydraulic hoses and pipes.



Oil sight gauge

The hydraulic oil check sight gauge is installed on the side of the hydraulic tank for convenient checks from ground level.



Transmission oil port

The transmission oil change port is also located for easy accessibility and comes with an anti-vandalism lock for your machine protection.



Specifications & Dimensions

HL740-7 HL740TM-7 HL740^{XTD}-7



Engine

Maker/Model	Cummins QSB5.9-C
Type	4-cycle, turbocharged, electronic controlled diesel engine
Gross power	140HP(104 kW) / 2,200rpm
Net power	133HP(99 kW) / 2,200rpm
Maximum power	145HP(108 kW) / 2,000rpm
Maximum torque	60kg·m(434 lb·ft) / 1,500rpm
No. of cylinders	6
Bore x Stroke	102 mm (4.02") x 120 mm (4.72")
Displacement	5.9 ℓ (359 cu in)
Compression ratio	18.0 : 1
Air cleaner	Dry, dual elements
Alternator	24V, 70 Amp
Battery	2 x 12V, 80 AH.
Starting motor	24V, 3.7 kW
Cooling	Hydraulic remote cooling system

Net power output of standard engine as installed in this vehicle(per SAE J1349) complete with fan, air cleaner, alternator, water pump, lubricating oil pump and fuel pump. No derating for continuous operating required up to 3048m (10000ft). This engine meets the EPA(TierII) / EU(StageII) Emission regulation.



Transmission

Full automatic power shift, countershaft type with soft-shift in range and direction. Properly matched torque converter to engine and transmission for excellent working ability. Two mode automatic shifting system.

Torque converter type	3-elements, single-stage single-phase	
Stall torque ratio	2.910 :1	
Tire	20.5-25, L3	
Travel speed	Km/h (mph)	
Forward	1st	6.9 (4.3)
	2nd	12.6 (7.8)
	3rd	24.0 (14.9)
	4th	38.2 (23.8)
Reverse	1st	7.3 (4.5)
	2nd	13.3 (8.3)
	3rd	25.3 (15.7)



Axles

Drive system	Four-wheel drive system
Mount	Rigid front axle and oscillating rear axle
Rear axle oscillation	± 12° (total 24°)
Hub reduction	Planetary reduction at wheel end
Differential	Limited slip front & Conventional rear
Reduction ratio	22.846



Hydraulic system

Type	Open-centered, tandem circuit system. Pilot-operated controls. Closed with pressure and vacuum relief.	
Pump	Helical gear type, 177 liters/min (46.8 USgpm)@governed rpm	
Control valve	Two function valve with single or two lever controls : Optional third-function valve with auxiliary lever. 220 kg/cm ² (3,130 psi)	
Relief valve setting		
Pilot system		
Type	Pilot oil pressure is generated by the pilot oil supply unit 30 kg/cm ² (427 psi)	
Relief valve setting		
Bucket controls		
Type	Pilot operated lift and tilt circuit, single-lever(joystick) control standard.	
Lift circuit	The valve has four functions ; raise, hold, lower and float. Can adjust automatic kickout from horizontal to full lift.	
Tilt circuit	The valve has three functions ; tilt back, hold and dump Can adjust automatic bucket positioner to desired load angle.	
Cylinder	Type : Double acting No. of cylinders-bore x stroke; Lift HL740-7 2-120 mm(4.7") x 738 mm(29.1") HL740TM-7 1-140 mm(5.5") x 500 mm(19.7") HL740XTD-7 2-100 mm(3.9") x 745 mm(29.3")	
Cycle time	HL740-7/HL740XTD-7	HL740TM-7
Raise (with load)	5.5 sec	5.5 sec
Dump	1.2 sec	1.4 sec
Lower (empty)	2.8 sec	2.8 sec
Total	9.5 sec	9.7 sec



Brakes

Service brakes	Hydraulically actuated, wet disc brakes actuate all 4 wheels independent axle-by-axle system. Single pedal braking including clutch cut off switch.
Parking brake	Spring-applied, hydraulically released wet disc brake in front axle .
Emergency brake	When brake oil pressure drops, indicator light alerts operator and parking brake automatically applies.



Steering system

Type	Full hydraulic power steering
Pump	Gear type, 99 liters/min(26.2 USgpm) @ governed rpm
Relief valve setting	210 kg/cm ² (2,990 psi)
Cylinder	
Type	Double acting
Bore x stroke	65 mm(2.5") x 420 mm(16.5")
Steering angle	40°(each direction)

Features

- Center-point frame articulation
- Load-sensing system
- Steering-wheel operated metering pump controls flow to steering cylinders
- Tilt and telescopic steering column




Service refill capacities

Fuel tank	228 liters (60.2 USgal)
Cooling system	35 liters (9.2 USgal)
Crankcase	16 liters (4.2 USgal)
Transmission	24 liters (6.3 USgal)
Front axle	21.2 liters (5.6 USgal)
Rear axle	21.2 liters (5.6 USgal)
Hydraulic tank	105 liters (27.7 USgal)
Hydraulic system (including tank)	165 liters (43.6 USgal)



Dimensions

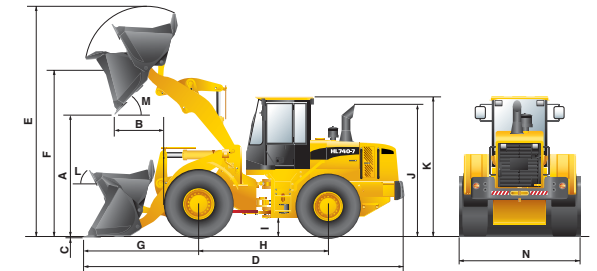

Description	UNIT	HL740-7	HL740XTD-7	HL740TM-7	
Bucket Type	General purpose bolt-on cutting edge				
A. Dumping clearance at max. height and 45° dump angle.	mm (ft-in)	2,850 (9' 4")	3,270 (10' 9")	2,915 (9' 7")	
B. Reach	Full lift	mm(ft-in)	970 (3' 2")	965 (3' 2")	1,275 (4' 2")
	7ft height	mm(ft-in)	1,500 (4' 11")	1,860 (6' 1")	1,790 (5' 10")
C. Digging depth(mm (in))	mm(ft-in)	93 (3.7")	130 (5.1")	100 (3.9")	
D. Overall length	on ground	mm(ft-in)	7,270 (23' 10")	7,750 (25' 5")	7,550 (24' 9")
	at carry	mm(ft-in)	7,230 (23' 9")	7,720 (25' 4")	7,500 (24' 3")
E. Overall height (fully raised)	mm(ft-in)	5,070 (16' 8")	5,480 (18')	5,150 (16' 11")	
F. Bucket pivot max. height	mm(ft-in)	3,830 (12' 7")	4,250 (13' 11")	3,990 (13' 1")	
G. Front overhang	mm(ft-in)	2,400 (7' 10")	2,810 (9' 3")	2,625 (8' 7")	
H. Wheelbase	mm(ft-in)	2,900 (9' 6")	2,900 (9' 6")	2,900 (9' 6")	
I. Ground clearance	mm(ft-in)	417 (1' 4")	417 (1' 4")	417 (1' 4")	
J. Height over exhaust	mm(ft-in)	2,900 (9' 6")	2,900 (9' 6")	2,900 (9' 6")	
K. Height over cab	mm(ft-in)	3,260 (10' 8")	3,260 (10' 8")	3,260 (10' 8")	
L. Roll-back angle	on ground	deg	42	42	50
	at carry	deg	47	49	54
M. Dump angle(deg)	deg	48	48	50	
Clearance circle	mm(ft-in)	11,770 (38' 7")	12,110 (39' 9")	11,840 (38' 10")	
N. Overall width	mm(ft-in)	2,550 (8' 4")	2,550 (8' 4")	2,550 (8' 4")	



Overview

Description	UNIT	HL740-7	HL740XTD-7	HL740TM-7	
Operating weight	kg (lb)	11,500 (25,350)	11,850(26,120)	12,050 (26,570)	
Bucket capacity	Heaped	m ³ (yd ³)	2.1 (2.7)	2.1(2.7)	2.0 (2.6)
	Struck	m ³ (yd ³)	1.78 (2.3)	1.78(2.3)	1.7 (2.2)
Breakout force-bucket	kg (lb)	11,880(26,190)	11,730(25,860)	10,650(23,480)	
Tipping load	Straight	kg (lb)	9,180(20,240)	8,320(18,340)	7,950(17,530)
	Full turn	kg (lb)	7,930(17,490)	7,210(15,900)	6,860(15,120)



Tires

Type	Tubeless, loader design tires
Standard	20.5-25, 16 PR, L3
Options include	17.5-25, 12 PR, L2
	17.5-25, 12 PR, L3
	20.5-25, 16 PR, L2
	17.5 R25 XHA* 20.5 R25 XHA*